Connecting Cables for Connector-Terminal Block Conversion Units (Shielded)



CSM_XW2Z_DS_E_5_3

Connect Connector-Terminal Block Conversion Units (XW2) to I/O Units for Programmable Controllers with one touch.



Shielded

Ordering Information

For 32-point, Connector-type I/O Units for Programmable Controllers XW2Z-XW2Z-A (For XW2D-20G6/XW2B-20G /-40G5-T/-20G5-D/

(For XW2D-20G6/XW2B-20GL)-40G5-1/-20G5-D/ XW2C-20G5-IN16/20G6-IO16/XW2E-20G5-IN16/ XW2F-20G7-IN16/-OUT16/XW2N-20G8-IN16)

XW2Z-050A XW2Z-100A
XW2Z-100A
XW2Z-150A
XW2Z-200A
XW2Z-300A
XW2Z-500A
XW2Z-010A
XW2Z-15MA
XW2Z-20MA

*Cable length L (m)



For 32-point, Connector-type I/O Units (Group 2) for Programmable Controllers For 64-point, Connector-type I/O Units for Programmable Controllers


XW2Z-B (For XW2D-40G6/XW2B-40G)

Туре	Cable length L (m) *	Model
-	0.5	XW2Z-050B
	1.0	XW2Z-100B
	1.5	XW2Z-150B
-	2.0	XW2Z-200B
Normal wiring	3.0	XW2Z-300B
g	5.0	XW2Z-500B
-	10.0	XW2Z-010B
-	15.0	XW2Z-15MB
	20.0	XW2Z-20MB
	0.5	XW2Z-050B-R1
	1.0	XW2Z-100B-R1
Reverse	1.5	XW2Z-150B-R1
wiring	2.0	XW2Z-200B-R1
	3.0	XW2Z-300B-R1
	5.0	XW2Z-500B-R1

XW2Z-LLLB-A ((For XW2F-40G7-IN32)
---------------	----------------------

Туре	Cable length L (m) *	Model
	1.0	XW2Z-100B-A
	1.5	XW2Z-150B-A
Normal wiring	2.0	XW2Z-200B-A
	3.0	XW2Z-300B-A
	5.0	XW2Z-500B-A

*Cable length L (m)




For 32-point, Connector-type Input Units (Group 2) for Programmable Controllers For 64-point, Connector-type Input Units for Programmable Controllers XW2Z-DDD

Cable len	gth L (m) *	Model
A	B	Model
1.0	0.75	XW2Z-100D
1.5	1.25	XW2Z-150D
2.0	1.75	XW2Z-200D
3.0	2.75	XW2Z-300D
5.0	4.75	XW2Z-500D
10.0	9.75	XW2Z-010D
15.0	14.75	XW2Z-15MD
20.0	19.75	XW2Z-20MD


20-pole Cable with Discrete-wire Press-fit Terminals XW2Z-

Cable length L (m) *	Model
1.0	XW2Z-100F
1.5	XW2Z-150F
2.0	XW2Z-200F
3.0	XW2Z-300F
5.0	XW2Z-500F
10.0	XW2Z-010F
15.0	XW2Z-15MF
20.0	XW2Z-20MF

*Cable length L (m)




*Cable length L (m)



For 32-point, Connector-type Output Units (Group 2) for Programmable Controllers For 64-point, Connector-type Output Units for Programmable Controllers XW2Z-DDL

Cable length L (m) *		Model
A	B	Model
1.0	0.75	XW2Z-100L
1.5	1.25	XW2Z-150L
2.0	1.75	XW2Z-200L
3.0	2.75	XW2Z-300L
5.0	4.75	XW2Z-500L
10.0	9.75	XW2Z-010L
15.0	14.75	XW2Z-15ML
20.0	19.75	XW2Z-20ML




For 96-point, Connector-type I/O Units for Programmable Controllers

XW2Z-DDH-1 (For CS1-series I/O Unit Connection)

Special Connecting Cables *		
Cable length L (m)	Model	
0.5	XW2Z-050H-1	
1.0	XW2Z-100H-1	
1.5	XW2Z-150H-1	
2.0	XW2Z-200H-1	
3.0	XW2Z-300H-1	
5.0	XW2Z-500H-1	
7.0	XW2Z-700H-1	
10.0	XW2Z-010H-1	
1.0	XW2Z-100H-1G	
1.5	XW2Z-150H-1G	
2.0	XW2Z-200H-1G	
3.0	XW2Z-300H-1G	
5.0	XW2Z-500H-1G	

*Cable length L (m)




*Up to two cables required for each Programmable Controller I/O Unit. Note: CS1 signal names connected to the XW2B/D are different for the XW2Z-□□H-□ and the XW2Z-□□H-□G. Refer to the I/O Signal Tables on page 9.

XW2Z-DDH-2 (For CS1-series I/O Unit Connection)

Special Connecting Cables *		
Cable ler	ngth L (m)	Model
A	B	Model
1.0	0.75	XW2Z-100H-2
1.5	1.25	XW2Z-150H-2
2.0	1.75	XW2Z-200H-2
3.0	2.75	XW2Z-300H-2
5.0	4.75	XW2Z-500H-2
10.0	9.75	XW2Z-010H-2
1.0	0.75	XW2Z-100H-2G
1.5	1.25	XW2Z-150H-2G
2.0	1.75	XW2Z-200H-2G
3.0	2.75	XW2Z-300H-2G
5.0	4.75	XW2Z-500H-2G

*Cable length L (m)




Linear lengths (not including bends)


*Up to two cables required for each Programmable Controller I/O Unit. Note: CS1 signal names connected to the XW2B/D are different for the XW2Z-000-H-000 and the XW2Z-000-H-000.

Refer to the I/O Signal Tables on page 9.

XW2Z



Special Connecting Cables *			
Ca	Cable length L (m)		Model
A	B	C	Model
1.0	0.75	1.0	XW2Z-100H-3
1.5	1.25	1.5	XW2Z-150H-3
2.0	1.75	2.0	XW2Z-200H-3
3.0	2.75	3.0	XW2Z-300H-3
5.0	4.75	5.0	XW2Z-500H-3
10.0	9.75	10.0	XW2Z-010H-3
*Up to two cables required for each Programmable Controller I/O Unit.			



For 32-point, MIL Connector-type I/O Units for Programmable Controllers XW2Z-

Cable length L (m) *	Model
0.25	XW2Z-C25K
0.5	XW2Z-C50K
1.0	XW2Z-100K
1.5	XW2Z-150K
2.0	XW2Z-200K
3.0	XW2Z-300K
5.0	XW2Z-500K

XW2Z-00N

Cable length L (m) *		Model
A	B	Model
1.0	0.75	XW2Z-100N
1.5	1.25	XW2Z-150N
2.0	1.75	XW2Z-200N
3.0	2.75	XW2Z-300N
5.0	4.75	XW2Z-500N
10.0	9.75	XW2Z-010N
15.0	14.75	XW2Z-15MN
20.0	19.75	XW2Z-20MN


XW2Z-

Cable length L (m) *	Model
0.5	XW2Z-C50X
1.0	XW2Z-100X
2.0	XW2Z-200X
3.0	XW2Z-300X
5.0	XW2Z-500X
10.0	XW2Z-010X

*Cable length L (m)



*Cable length L (m)



Linear lengths (not including bends)

*Cable length L (m)

Ratings and Specifications

Rated current	1 A
Rated voltage	125 VAC 24 VDC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.) *1
Insulation resistance	100 MΩ min. (at 500 VDC)
Dielectric strength	500 VAC for 1 min (leakage current: 1 mA max.) *2
Ambient operating temperature	0 to 80°C
*1 Contract registering for the C	

*1. Contact resistance for the Connector. *2. Dielectric strength for the Connector.

Materials and Finish

Item	Pa	art name		Materials and Finish	
		Housing		Fiber-glass reinforced PBT resin (UL94V-0)/black	
	XG4M-2030	Cover		- Fiber-glass territorceu FBT tesiti (OL94V-0)/black	
	XG4M-4030	Contacts	Mating end	Phosphor bronze/nickel base, 0.15-µm gold plating	
			Press-fit end	Phosphor bronze/nickel base, 2.0-µm tin plating	
Connectors	nnectors XG4T-2004/4004 Strain Relief		:	Fiber-glass reinforced PBT resin (UL94V-0)/black	
		Housing		Polyester resin (UL94V-0)/black	
	FCN-367J024-AU/F *	Contacts	Mating end	Copper alloy/gold plated	
	FCN-367J040-AU/F		Press-fit end	Copper alloy/tin plated	
		Connecting screw		Steel/nickel plated	
Cable	UL2464 Interface Cable	Interface Cable		AWG28/Shielded	
Crimp terminal	Forked crimp terminal			1.25 Y AS 3.5 or the equivalent	

Note: These housings, contacts, and connecting screws are made by Fujitsu.


For 32-point, Connector-type I/O Units for Programmable Controllers

XW2Z-

(For XW2D-20G6/XW2B-20G□/-40G5-T/-20G5-D/ XW2C-20G5-IN16/20G6-IO16/XW2E-20G5-IN16/ XW2F-20G7-IN16/-OUT16/XW2N-20G8-IN16)




Wiring Diagram




For 32-point, Connector-type I/O Units (Group 2) for Programmable Controllers For 64-point, Connector-type I/O Units for Programmable Controllers

XW2Z- B (For XW2D-40G6/XW2B-40G)





Reverse wiring



XW2Z-00B-A (For XW2F-40G7-IN32)




W2F-40G	i7-IN32)		
/iring Dia	aram		
FCN367J040			о т
	I-AU/F	XG4M-403	50-T
B20		- 1	
B19		2	
B18		3	
B17		5	
B16		7	
B15		9	
B14		- 11	
B13		13	
B12		15	
B11		17	
B10		19	
B9		- 4	
B8		6	
B7		- 8	
B6		10	
B5		12	
B4		14	
B3		16	
B2		18	
B1		20	
A20		- 21	
A19		- 22	
A18		- 23	
A17		- 25	
A16		27	
A15		- 29	
A14		31	
A13		33	
A12		- 35	
A11		- 37	
A10		- 39	
A9		- 24	
A8		- 26	
A7		- 28	
A6		- 30	
A5		32	
A4		34	
A3		36	
A2		- 38	
A1		40	

For 32-point, Connector-type Input Units (Group 2) for Programmable Controllers For 64-point, Connector-type Input Units for Programmable Controllers

XW2Z-DDD



Wiring Diagram

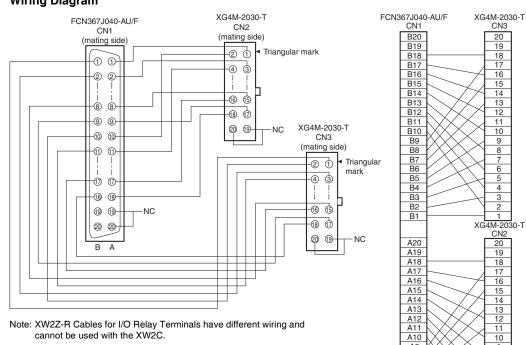

Note: XW2Z-R Cables for I/O Relay Terminals have different wiring and cannot be used with the XW2C.

9 8 7

2


A9 A8

A7 A6


A5 A4 A3 A2 A1

20-pole Cable with Discrete-wire Press-fit Terminals

XW2Z-DDF



Wiring Diagram




Connector Pin No. Table					
Forked terminal	No. of cores	Insulation color	Dot marks	Dot color	Connector pin No.
1	1	Blue		Red	1⊲
2		Blue		Black	2
3	2	Pink		Red	3
4	2	Pink		Black	4
5	3	Green		Red	5
6	3	Green		Black	6
7	4	Orange		Red	7
8		Orange		Black	8
9	5	Gray		Red	9
10		Gray		Black	10
11		Blue		Red	11
12	6	Blue		Black	12
13	7	Pink		Red	13
14	7	Pink		Black	14
15		Green		Red	15
16	8	Green		Black	16
17		Orange		Red	17
18	9	Orange		Black	18
19	10	Gray		Red	19
20	10	Gray		Black	20


For 32-point, Connector-type Output Units (Group 2) for Programmable Controllers For 64-point, Connector-type Output Units for Programmable Controllers

XW2Z-DDL




Wiring Diagram

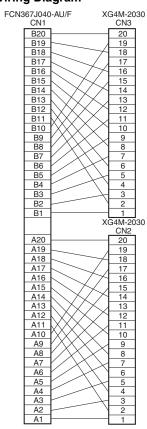

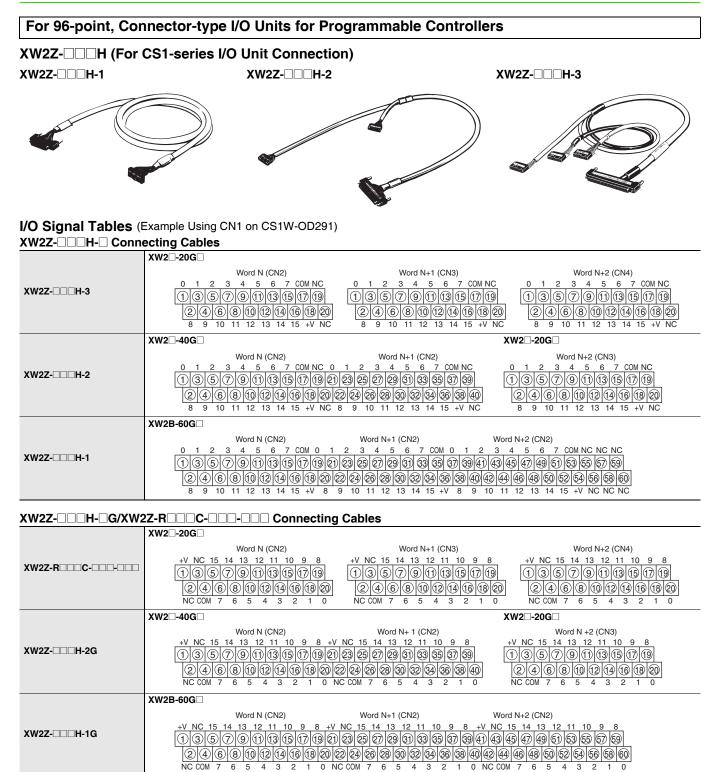

Note: The XW2Z-DDH-DG I/O signal arrangement is oriented the same as the XW2Z-R Cables for I/O Relay Terminals.

XW2Z

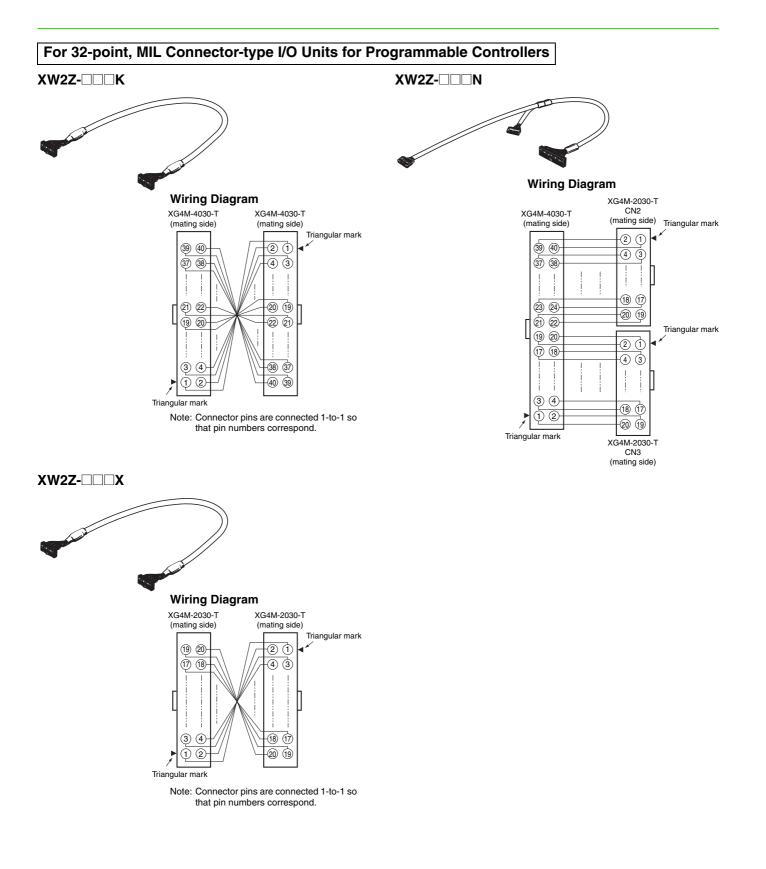

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE

PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See http://www.omron.com/global/ or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions. Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation Industrial Automation Company